




ENCELIUM

ENERGY CONTROL SYSTEM HARDWARE

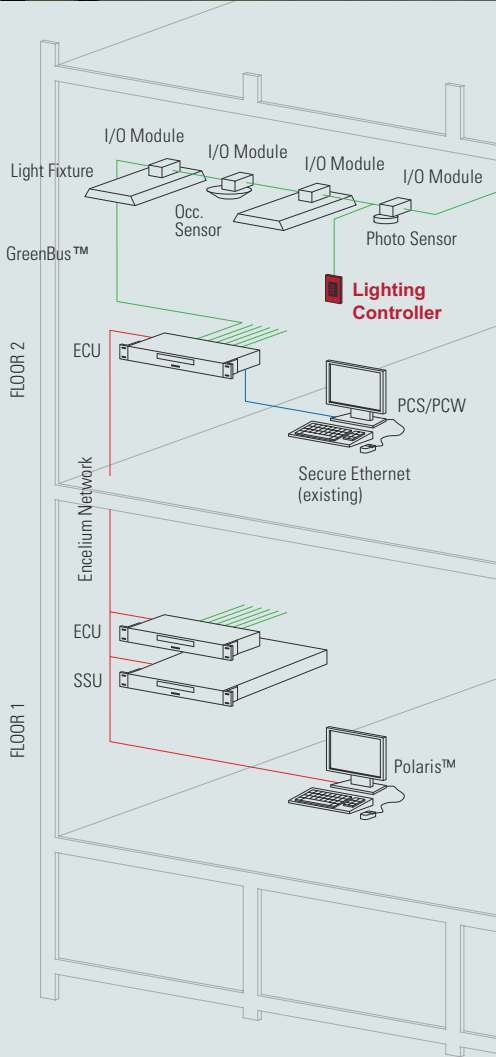

SYSTEM ARCHITECTURE

This illustration shows how each component is easily integrated into the Encelium Energy Control System. Each light fixture, sensor and lighting controller is daisy-chained back to the Energy Control Unit (ECU) using prefabricated 'click & go' GreenBus™ communication cabling. ECUs typically control individual floors and are linked via an Ethernet Network. Internet or LAN connection allows Windows floor plan based control software to be operated anywhere on the network. For reference, the component shown on this data sheet is highlighted. ■

■ **INDUSTRIAL LIGHTING CONTROLLER (ILC)**

The ILC Industrial Lighting Controller is a single zone wall mounted controller that provides local on/off control over a lighting zone. Utilizing a standard single-gang form factor in a rugged stainless steel housing, the ILC is a low voltage controller that connects to the Encelium ECS system through GreenBus™ cable with standard RJ-45 connectors. Each ILC can be set-up and modified through Encelium's Polaris software interface.

The ILC is generally located at entry points to a zone or department and is used to "activate" or "de-activate" a lighting zone. The zone status is indicated by an LED display with yellow indicating ON and blue indicating OFF.

Where lighting zones are controlled by a time schedule (rather than by occupancy sensors), the ILC also allows manual override of the time schedule by simply "re-activating" the zone about to be shut down. During shut down mode, the ILC will alternately flash blue and yellow LED's to indicate to occupants that an override is necessary.



MECHANICAL SPECIFICATIONS

- Dimensions: 4.09" H X 1.3" W X 0.91" D
- Max. ambient Temperature +40°C /104°F
- Mounts in standard size wall box of at least 2.4" depth

ELECTRICAL SPECIFICATIONS

- Class II Low Voltage device
- Power through GreenBus™ connection

DATA SPECIFICATIONS

- Two RJ45 ports for GreenBus™ connection
- Interconnected with prefabricated GreenBus™ cable

Specifications subject to change without notice.

Install in accordance with all applicable national and local electrical and building codes.

Cat. # ILC-300

ENCELIUM

CORPORATE HEAD OFFICE
 500 Frank W. Burr Boulevard
 Floor 1, Suite 29
 Teaneck, NJ 07666 U.S.A.
 Tel. 1.201.928.2400
 Tel. 1.201.928.4028

CANADIAN OFFICE
 68 Leek Crescent - Unit A
 Richmond Hill, ON L4B 1H1
 CANADA
 Tel. 1.905.731.7678
 Tel. 1.905.731.1401

TECHNICAL SUPPORT
BUS HOURS 1.888.531.7573
AFTER HOURS 1.800.805.9363

EMAIL technicalsupport@encelium.com
WEB www.encelium.com/technicalsupport