

### SYSTEM ARCHITECTURE

This illustration shows how each component is easily integrated into the Encelium Energy Control System. Each light fixture, sensor and lighting controller is daisy-chained back to the Energy Control Unit (ECU) using prefabricated 'click & go' GreenBus™ communication cabling. ECUs typically control individual floors and are linked via an Ethernet Network. Internet or LAN connection allows Windows floor plan based control software to be operated anywhere on the network. For reference, the component shown on this data sheet is highlighted. ■



### ■ SYSTEM SUPPORT UNIT (SSU)

The System Support Unit serves as the database server for all data related to an Encelium system installed in a facility. The SSU stores all system settings and parameters, including attributes for zones, fixtures, sensors, zone controllers and scene controllers. Additionally, it maintains multiple set-points, including those for light levels, time schedules, occupancy sensor timeouts and demand response or load shedding features. The SSU also logs historical data regarding the system's operational and energy savings results.


The SSU provides the ability to remotely access a system in order to change system settings or configuration, analyze system performance or energy data or troubleshoot thereby providing quick and seamless customer support. The SSU also hosts the web interface required for the web enabled Personal Control Software. In addition, optional building automation system interfaces such as BACnet, A/V Interface, and Niagara are available upon request.

Each Encelium system requires one SSU, typically located in a building's electrical room, mounted with an ECU.




**CONNECTIONS**

Typical wall mounting of ECU with SSU, Ethernet Switch and Power Bar.

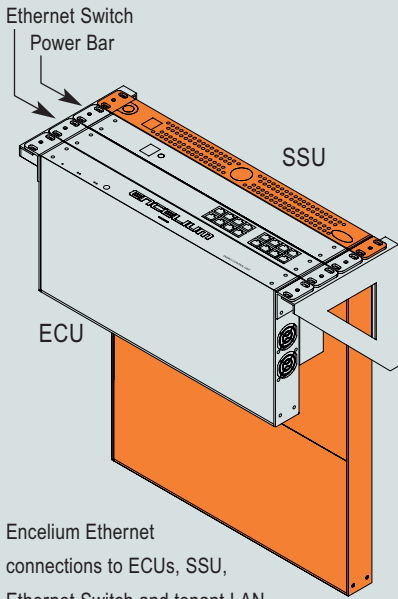

To additional ECUs

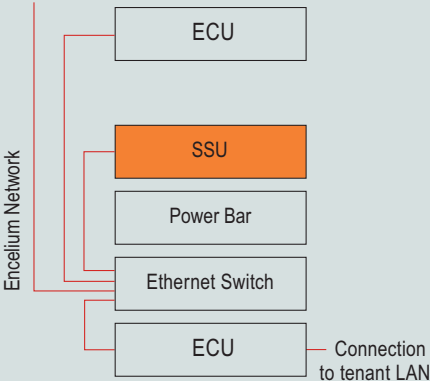

**GENERAL**

- Pentium Class Processor
- Windows 7 Operating System

**CHASSIS**

- 1U rack height (1.69" H x 17.64" W x 27.56" D w/bezel)
- Max weight 31.49 lb./ 14.3 kg
- For mounting on standard 19" rack (1U width), individual wall mount or optional 4U wall mounted rack.

**POWER**

- 1 x 400W (non-redundant)
- Auto-ranging 110/220 Volts

**ENVIRONMENTAL**

- Operating Temperature: 10°C to 35°C (50°F to 95°F)
- Operating Relative Humidity: 10% to 90% (non-condensing), 28°C (82.4°F) maximum wet bulb temperature
- Operating Maximum Vibration: 3Hz - 200Hz at 0.25G
- Operating Maximum Shock: 31G at 2.6ms

**REGULATORY**

- FCC (U.S. only) Class A
- DOC (Canada) Class A
- UL 60950
- CAN/CSA-C22.2 No. 60950

**Specifications subject to change without notice.**

Install in accordance with all applicable national and local electrical and building codes. For more details, consult factory representative.

**Cat. # SSU-200**



**CORPORATE HEAD OFFICE**  
 500 Frank W. Burr Boulevard  
 Floor 1, Suite 29  
 Teaneck, NJ 07666 U.S.A.  
 Tel. 1.201.928.2400  
 Fax 1.201.928.4028

**CANADIAN OFFICE**  
 68 Leek Crescent - Unit A  
 Richmond Hill, ON L4B 1H1  
 CANADA  
 Tel. 1.905.731.7678  
 Fax 1.905.731.1401

**TECHNICAL SUPPORT**  
 1.888.531.7573

**EMAIL** [technicalsupport@encelium.com](mailto:technicalsupport@encelium.com)  
**WEB** [www.encelium.com/technicalsupport](http://www.encelium.com/technicalsupport)